

City University of New York (CUNY)

CUNY Academic Works

International Conference on Hydroinformatics

2014

Effective AMI System Based On Multi-Channel Cluster

Seok Rak Kang

Byoung Sup Shim

Seok Jun Choi

Ji Hyoung Yi

Kyung Taek Yum

[How does access to this work benefit you? Let us know!](#)

More information about this work at: https://academicworks.cuny.edu/cc_conf_hic/161

Discover additional works at: <https://academicworks.cuny.edu>

This work is made publicly available by the City University of New York (CUNY).
Contact: AcademicWorks@cuny.edu

EFFECTIVE AMI SYSTEM BASED ON MULTI-CHANNEL CLUSTER

KANG, SEOK RAK(1); SHIM, BYOUNG SUP(1); CHOI, SEOK JUN(1); YI, JI HYOUNG(1); YUM, KYUNG TAEK(2)

(1): Leotek Co., Ltd, (B-#701, Woolim Lion's Valley) 425-1, Chungchun-Dong, Bypyung-Gu, Incheon, S. Korea

(2): Smart Water Grid Research Group, 310, 169 Getpearl -ro, Yeonsu-gu, Incheon, S. Korea

ABSTRACT

Recently, high-efficient, next-generation infrastructure system using information communication technology is increasingly required to overcome limitation of water resource management, and Smart Water Grid is being developed to resolve imbalance by effectively allocating, managing and carrying water resources. Therefore, the article aims to enhance efficiency of management through physical, logical consumer channel clustering and reliability on metering reading data, and achieve expandability of wireless metering reading network through channel use that can be identified between proximate clusters, by suggesting channel set-up based on multichannel cluster mixed with network channel and group channel to resolve the problems stated above and implement various services. Further, this paper aims to reduce installment time and maintenance repair cost through hierarchical network structure composed with four differentiated devices in wireless AMR systems, and suggest wireless AMR network based on multichannel cluster substantializing various services by supporting various operation modes through quick error recovery and back up functions.

1. Introduction

The Automatic Meter Reading(AMR) system is a technology automatically reading real-time meter and conveniently searching, printing out, and managing meter detecting data at a control office or where a specific reading meter system is installed, without meter men's visit to households in a remote place to read utility meter of every kind used by consumers such as apartment houses, mixed-use buildings, villas, detached houses[1]. The AMR technology is classified into wired method and wireless method depending on communication systems composed. Typically, a wired method of the technology is using telephony network[2] and power line network[3], whereas a wireless method of the technology is composing low power wireless reading meter network and gathering reading meter data and sending them to remote sites by using CDMA network or wireless LAN[4]. Characteristics of utility serve a major factor to determine a wired/wireless communication method. As electricity, power line

communication network is effective to use as power network is already constructed and no additional cost occurs to use. However, utility such as water or gas supply composes wireless communication systems due to difficulty in electricity supply, and recently wireless AMR technology applied to various utilities is widely distributed due to rapid development in wireless technology and decreased price in wireless communication devices. Apart from this meter reading service, wireless AMR service evolves itself into Advanced Metering Infrastructure (AMI) which can offer a wide array of interactive services such as services for the elderly living alone and notification of electricity use according to utility characteristics[5]. As such, for wireless AMR, non-licensed ISM band of 424MHz and 2.4GHz bands is used in South Korea as it can be used free of charge[6]. Currently, as wireless AMR network is composed by using communication channel to the frequency bands specified above to compose low power wireless metering reading network in wireless methods, reliability on wireless communication is lowered as chances of collision between data is higher as the number of consumer is higher. To reduce chances of collision between data, a prerequisite is to limit consumer expandability as the number of consumer node is limited, and a change of metering value cannot be collected between fixed metering periods in schedule-based one way wireless AMR systems. This makes it difficult to expand as various services. Therefore, the article aims to enhance efficiency of management through physical, logical consumer channel clustering and reliability on metering reading data, and achieve expandability of wireless metering reading network through channel use that can be identified between proximate clusters, by suggesting channel set-up based on multichannel cluster mixed with network channel and group channel to resolve the problems stated above and implement various services. Further, the article aims to reduce installment time and maintenance repair cost through hierarchical network structure composed with four differentiated devices in wireless AMR systems, and suggest wireless AMR network based on multichannel cluster substantializing various services by supporting various operation modes through quick error recovery and back up functions.

2. AMI Network Composition based on Multi-channel Cluster

The AMI Meter Reading Network herein suggested consists of ED collecting the use from a meter, OHD installed outdoor for users to identify metering values, EDM managing ED and OHD, and NC transmitting data metering through mobile communication network. As the AMI Meter Reading System can install one NC and EDM from 1 to 10 at maximum, and each EDM can collect metering data from 100 consumers at most, a single NC can collect data from 1,000 meters at most, which can reduce metering maintenance cost in an effective manner.

As fig. 1, the NC directly manages each region, and is connected to entrepreneurs' server with TCP/IP network through exclusive lines. The server requests scheduled-meter reading to the NC in each region, and collects data through respective TCP/IP connection from numerous NCs. Further, all collected data are saved as database in server, and many clients can be offered various services through connection to servers. By supporting mobile client, service can be offered as PC client through exclusive application programs for tablet PC and smartphone, which enables users who have an administrative account to request meter reading and collect data in real time.

Channel allocation and management of AMI network based on multi-channel cluster are as follows. Communication channel between NC and EDM is defined as network channel, and communication channel between EDM and ED or OHD is defined as group channel, which enables EDM to have network channel and group channel set-up. Each EDM uses network

channels when it communicates with NC, whereas the EDM uses group channels when it communicates with OHD, a lower layer of it. Meter reading collection through group channel of each EDM can prevent interference between identical channels as it is caused by somewhat overlapped metering reading ranges or close distance. AMR network set-up based on multi-channel can read meter through group channel in each EDM and separate and operate metering reading data through network channel, which enables limited frequency channel resources to be used in an effective manner.

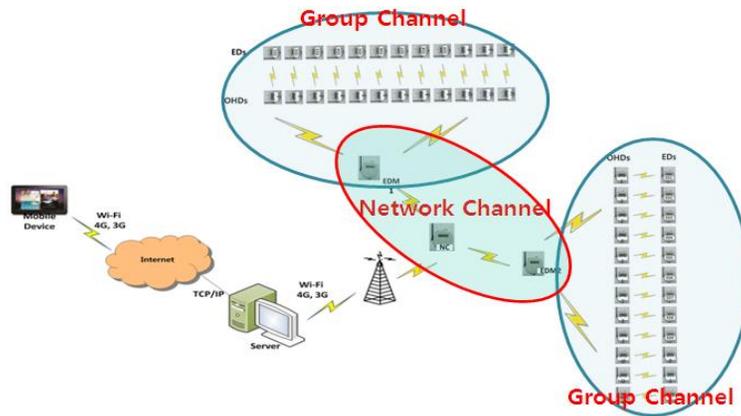


Figure 1. AMI network configuration based on multi-channel clustered

Network channel operation is a service conducting meter reading on all consumers of overall AMI networks. When meter reading is required, a command of regular meter reading is transmitted from server to NC. When a command of regular meter reading is received, the NC notifies meter reading by transmitting Request Data from network channel to EDM after transmitting ACK to server. When the EDM receives the request data from NC, it transmits EDM Reply to notify it properly receive them. The NC transmits Reply Confirm to notify that it properly receives the reply. The EDM changes its own group channels and initiates communication with OHD, a lower layer of EDM, after it receives Reply Confirm. Next, the EDM conducts a series of operation. After collecting data from each OHD, the EDM is changed to network channel and confirms whether or not there is communication between other EDM and NC. In case that there is no other communication, the EDM confirms whether or not the NC can receive data by transmitting RTS to the NC. The EDM receiving CTS separately transmits data received from each OHD in accordance with assigned packets. In case there is no error in data received from the EDM, the NC transmits ACK to EDM. The NC transmits data received from the EDM to server.

At network channel operation, the EDM is turned into group channels, transmitting Request Data received from the NC to the OHD in a Broad Casting manner. The OHD calculates time to transmit by analyzing Request Data received from the EDM.

When it is time for the OHD to transmit, it transmits Request Data to the ED. When the ED receives Request Data from other devices, it can identify its operation time, and when it is time to move, the ED receives Request Data from the OHD, and the ED transmits Request Data of its own to the OHD after the ED receives Request Data. The OHD receives Request Data from the ED, and saves them to transmit them to the EDM. The EDM saves data received from the OHD.

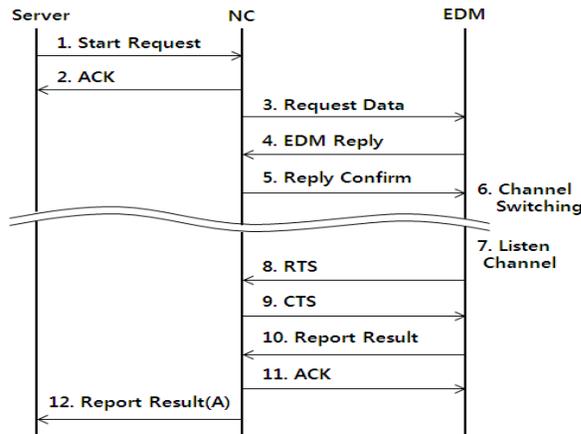


Figure 2. Device operation of Network channel

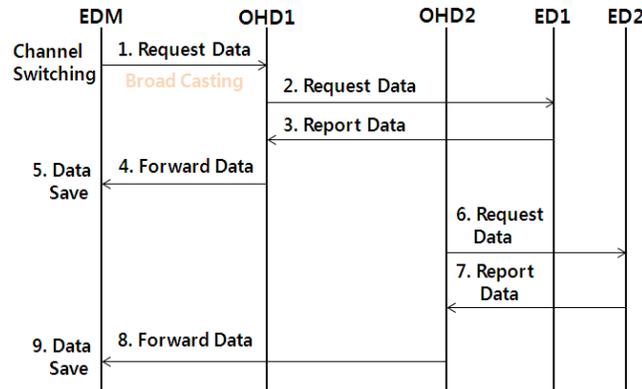


Figure 3. Device operation of group channel

2.3. Power Scheduling

As fig. 4, each device in the AMI system stands for Transition Specification Periodic (TSP) to minimize power consumption, repeating transition between Sleep Status (Ts) and Active Status (Ta). Before transition to Sleep Ts, the system lifts all resources except for RTC timer to minimize current consumption. When a specific time period is passed and RTC interrupt occurs, the OHD is transited to Active Ta. Together with this transition, judged is whether or not there is a command required for the OHD by detecting preamble command signals transmitted from devices in a higher layer. As preamble command signals consist of certain IDs reserved in advance, in case of certain IDs the system maintains Active Ta, but otherwise, it is transited to Sleep Ts. It takes a very short time to judge preamble command signals. This is a core algorithm that minimizes power consumed of low power scheduling. A lower layer device judges command signals through preamble command signals from the EDM, a higher device, and maintains Active Ta to wait for Request Data. Lower-layer devices recognizing Request Data transit a current status to Sleep Ts again, shortly wake to Time Slot fixed at each lower-layer device beforehand, transmit result data by required commands to a higher-layer device, and is transited again to Sleep Ts. Afterwards, as only to complete communication in all other devices on the same layer to go back to transition specification periodic between Sleep Ts and

Active T_a , there is Time Slot fixed to autonomously protect devices not to interrupt communication by transmitting preamble command signals from other devices or causing interference.

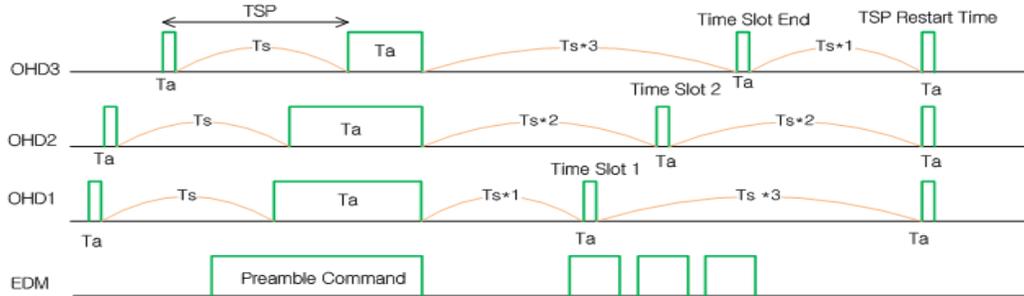


Figure 4. Low-power scheduling structure

3. Performance Evaluation and Consideration

3.1. Experiment Environment

To evaluate the existing AMR system, time for collecting meter reading data of the AMI system based on multi-channel cluster, and battery life expectancy, developed was a self-simulator by using C language and C++. The simulator developed has parameters as Table 1.

Table 1. Simulation Condition

Parameter	Value
RF data rate	200Kbps
No. of consumer	100, 200, 300, 400, 500, 600, 700, 800, 900, 1000
Length of inspection data	128byte
TSP(T_a+T_s)	2, 3, 4, 5, 6, 7(sec)
Inspection cycle	1, 2, 3, 4(hour)
NC network configuration	Multi-channel configuration
Battery capacity	1cell : 3.6V, 19A

3.2. Analysis on meter reading time and battery life expectancy

As fig. 5, time for collecting meter reading data is proportionate to the number of consumer and length of TSP between Sleep T_s and Active T_a . As the number of consumer is higher, and length of TSP is higher, response time is slower; this is a case from a perspective of EDM. For the AMI system based on multi-channel cluster herein suggested, each EDM has its own group channels, making it possible to conduct concurrent data meter reading on every consumer. Therefore, as fig. 5, in case that a single EDM is 2 for specification periodic, data aggregation time is similarly about 15 minutes for both when meter reading is conducted on 100 consumers and meter reading is conducted on 1,000 consumers by composing them to 10 EDMs. Definitely, the EDM transmits meter reading data to the NC in a competitive manner, considering consumed time caused by dividing data in quantity and transmitting them to server. However, this is not an important issue to determine temporal performance. Further, if length of TSP between Sleep T_s and Active T_a is reduced, response time is shorter but current consumed

is increased as Active Ta is lengthened of each device. Therefore, as selection on Specification Periodic leads to performance and cost issues, a prerequisite is to select proper specification periodic resulting from the number of consumers on the process of installing and initializing AMI system.

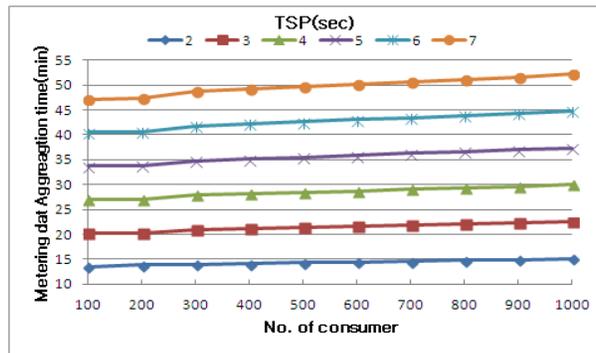


Figure 5. Metering data aggregation time

To obtain life expectancy that satisfies users, achieved can be a method increasing the number of battery cell consumed for the EDM. For the life expectancy herein, the AMI device installed is moving for a period of a meter replacement cycle (e.g. 8 years for water meter) without exchanging batteries. As Table 2, the number of consumer is close to 100, which represents analysis on EDM life expectancy on battery cell composition by meter reading cycle, used for the EDM.

Table 2. Life time Analysis of EDM(unit:year)

No. of consumer	Inspection cycle[1hour]				Inspection cycle[2hour]			
	Cell 1	Cell 5	Cell 10	Cell 20	Ce11 1	Cell 5	Cell 10	Cell 20
10	1	12	24	48	4	22	45	90
100	0	1	3	6	1	3	6	13
No. of consumer	Inspection cycle[3hour]				Inspection cycle[4hour]			
	Cell 1	Cell 5	Cell 10	Cell 20	Ce11 1	Cell 5	Cell 10	Cell 20
10	6	32	63	126	8	40	79	158
100	1	5	10	19	1	6	13	25

4. Conclusion

The article herein is about channel set-up and scheduling methods for network allocation of meter reading network in the AMI system, suggesting wireless AMR structure based on multi-channel cluster making it possible for channel set-up and active connection based on multi-channel cluster mixed with network channels between NC and EDM as channel set-up methods for the AMI system's network allocation, and group channels between EDM, OHD, and ED. By setting up channels based on multi-channel cluster mixed with network channels and group channels, efficiency in management can be maximized through physical, logical consumer channel clustering. Further, channel use differentiated between proximate clusters achieves prompt collection on meter reading data and expandability of AMR network.

In conclusion, the AMI system can reduce installment time and maintenance repair cost through hierarchical network structure consisting of four differentiated devices, substantialize a wide array of services by supporting various operation mode through prompt error recovery and back-up functions, and offer various services through increased battery life expectancy and server-based service requests by presenting efficient power management techniques

5. Acknowledgments.

This research was supported by a grant (12-TI-C01) from Advanced Water Management Research Program funded by Ministry of Land, Infrastructure and Transport of Korean government.

REFERENCES

- [1] Y.S. You and S.W. Jeon, "IT device and home automatic meter reading," Weekly Technology Trends, No. 1333, (2008), pp.19-28
- [2] C. Brasek., "Urban utilities warm up to the idea of wireless automatic meter reading," COMP CON EN, vol. 15, Issue 6, (2005), pp.10-14
- [3] Q. Gao, J. Y. Yu, P. H. J. Chong, P. L. So, E. Gunawan, "Solutions for the silent node problem in an automatic meter reading system using power-line communications," IEEE POW D, Vol. 233, No. 2, (2008), pp.150-156
- [4] T. Khalifa, K. Naik, and A. Nayak, "A survey of communication protocols for automatic meter reading applications," IEEE COMMUN SURV TUT, Vol. 13, No. 2, (2011), pp.168-182
- [5] K. I. Hwang, "Data aggregation method guaranteeing minimum traffic in multi-hop automatic meter reading networks", J-KICS, Vol. 36, No. 7, (2011), pp.848-857
- [6] Korea Radio Promotion Association, Study of Radio Frequency for Automatic Meter Reading(AMR), Ministry of Information and Communication, (2003)