

City University of New York (CUNY)

CUNY Academic Works

International Conference on Hydroinformatics

2014

Parallel Numerical Modeling Of Two-Phase Flow Process In Porous Medium

Wenginq Wang

Björn Zehner

Norbert Boettcher

Uwe-Jens Goerke

Olaf Kolditz

[How does access to this work benefit you? Let us know!](#)

More information about this work at: https://academicworks.cuny.edu/cc_conf_hic/344

Discover additional works at: <https://academicworks.cuny.edu>

This work is made publicly available by the City University of New York (CUNY).
Contact: AcademicWorks@cuny.edu

PARALLEL NUMERICAL MODELING OF TWO-PHASE FLOW PROCESS IN POROUS MEDIUM

WENQING WANG¹, THOMAS FISCHER¹, BJÖRN ZEHNER², NORBERT BÖTTCHER¹,
UWE-JENS GÖRKE¹ AND OLAF KOLDITZ^{1,3}

(1): *Helmholtz Center for Environmental Research - UFZ, Leipzig, Germany*

(2): *Federal Institute for Geosciences and Natural Resources, Berlin, Germany*

(3): *Dresden University of Technology, Dresden, Germany*

INTRODUCTION

The carbon capture and storage (CCS) concept [1] is under discussion as a promising transition technology fostering the reduction of the increasing CO₂ amount in the atmosphere being an important factor in the global warming [2]. It is suggested to capture CO₂ from fossil fuel power plants or other producers and to store it into deep geological formations, or in the form of mineral carbonates. The motivation of this work is driven by the requirement to improve the computational efficiency in the numerical modeling of the hydraulic processes during CO₂ injection and storage [3, 4], especially into real sites such as the Ketzin research site for CO₂ storage in Germany [5, 6]. Concerning numerical modeling of such problems, a very fine level of spatial discretization is needed in order to cover the real medium properties of the geological formations, which exhibits strong heterogeneity. This leads to a system of linear equations with millions of unknowns to be built up and solved. Moreover, the computational tasks of assembling and solving of the linear equation systems have to be carried out for many time steps due to the long time interval of the CO₂ injection and storage to be simulated, and meanwhile due to the complexity of the problem such as the nonlinearity of coupled processes and heterogeneity of the material properties. This gives a big challenge to perform such numerical modeling in the conventional sequential manner on a single computer or using a single core of a computer. Based on the previous experience in the parallelization of the finite element method implemented in the framework of OGS in C++ [7, 8] with MPI, we use PETSc routines to parallelize the finite element scheme for the simulation of two-phase flow in large scale applications. In this work, the parallelized FEM is applied to numerical simulate the CO₂ storage in the Ketzin pilot.

PARALLEL FEM SCHEME

A distributed parallel FEM scheme is realized by the following general procedure:

1. Partition mesh by using METIS,
2. Start the parallel finite element program,
3. Read subdomain mesh or partition generated in step (1) in the parallel manner such that the memory usage of the mesh is distributed to computer nodes,

4. Assemble the matrix and the right-hand side vector belonging to the subdomain in a parallelized manner,
5. Assign boundary conditions locally,
6. Solve the system of equations by using PETSc

MODELING RESULTS

The domain with an area of $5 \times 5 \text{ km}^2$ is discretized into 4,043,119 tetrahedra, which gives 707,713 nodes as shown in Fig. 1.

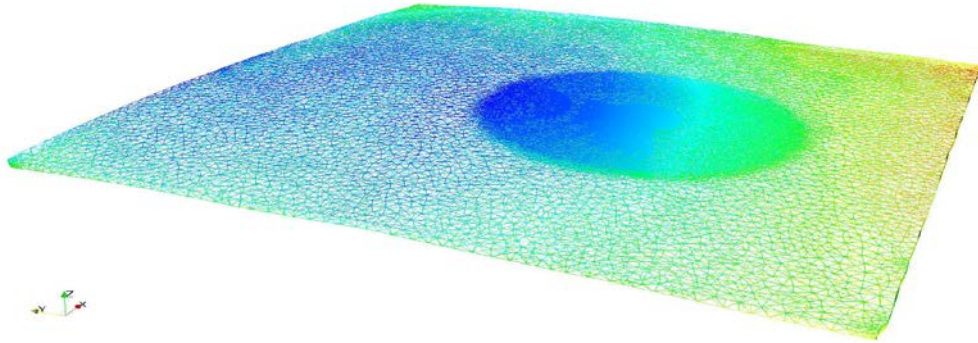


Fig. 1: Mesh of the study domain of the Ketzin site

The two-phase flow during the injection duration of 1,595 days is simulated. Two sets of simulations have been conducted as: simulations with homogeneous hydraulic properties, and simulations with heterogeneous hydraulic properties. The speedup achieved in the simulations with homogeneous hydraulic properties is illustrated in Fig. 2.

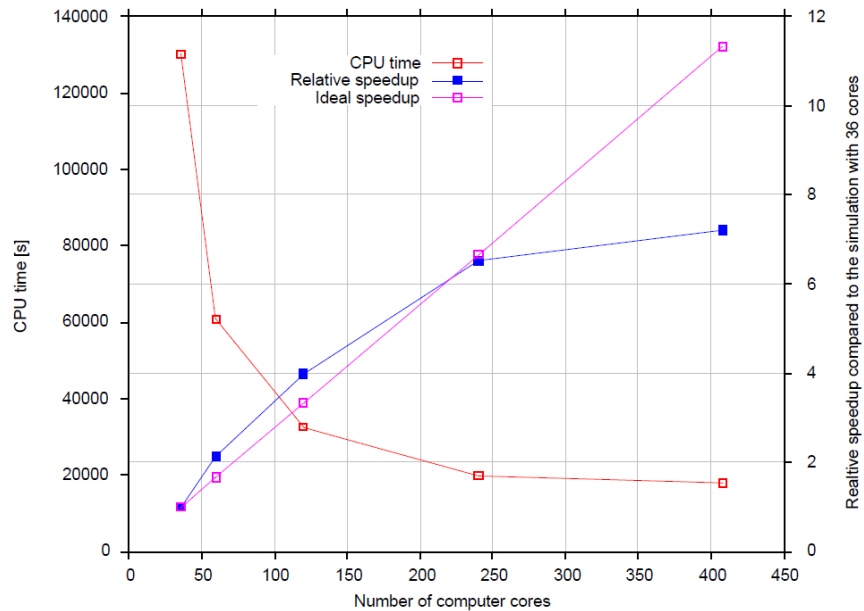


Fig. 2: Speedup of the simulations with homogeneous material properties

While for the case with heterogeneous hydraulic properties, two simulations have been conducted with compute cores of 240 and 360, respectively. The simulation with 240 cores took 71,393 seconds of CPU time (3,536 seconds by linear solvers), while with 360 cores it took 33,824 seconds of CPU time (2,005 seconds by linear solver).

The simulated injection pressure variation at a specified observation point is close to the measured curve as shown in Fig. 3.

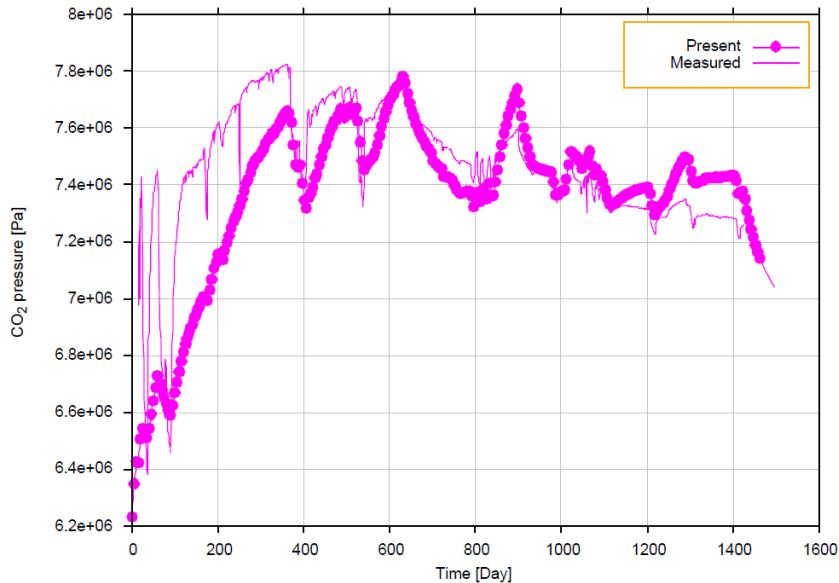


Fig. 3: Pressure variation at a specified observation point

A more detailed presentation of this material will be available through Wang *et al.* [9], forthcoming.

Acknowledgments

This work is partially supported by the CO2MAN project funded by the German Federal Ministry of Education and Research (BMBF), and the industrial partners of VNG, Vattenfall, RWE, Statoil, Dillinger Hüttenwerke, Saarstahl and OMV. The authors would like to express their thanks to Thomas Kempka and Sonja Martens at Helmholtz-Centre Potsdam – GFZ, German Research Centre for Geosciences for their constructive comments. The authors are also grateful to the vital support of the Linux cluster team at UFZ, Thomas Schnicke, Ben Langenberg and Christian Krause. In addition, the efforts by the developers of PETSc are appreciated.

REFERENCES

- [1] B. Metz, O. Davidson, H. De Coninck, M. Loos, and L. Meyer. IPCC special report on carbon dioxide capture and storage. Technical report, Intergovernmental Panel on Climate Change, Geneva (Switzerland). Working Group III, 2005.
- [2] M Mercedes Maroto-Valer, Chunshan Song, and Soong Yee Soong. Environmental challenges and greenhouse gas control for fossil fuel utilization in the 21st century. Springer, 2002.

- [3] O. Kolditz, S. Bauer, C. Beyer, N. Böttcher, P. Dietrich, U.J. Görke, T. Kalbacher, C.H. Park, U. Sauer, C. Schtze, H. Shao, A. Singh, J. Taron, W. Wang, and N. Watanabe. A systematic benchmarking approach for geologic CO₂ injection and storage. *Environmental Earth Sciences*, 67(2):613–632, 2012.
- [4] Trine S. Mykkeltvedt and Jan M. Nordbotten. Estimating effective rates of convective mixing from commercial-scale injection. *Environmental Earth Sciences*, 67(2):527–535, 2012.
- [5] S. Martens, T. Kempka, A. Liebscher, S. Lüth, F. Möller, et al. Europe’s longest-operating on-shore CO₂ storage site at Ketzin, Germany: a progress report after three years of injection. *Environmental Earth Sciences*, 67(2):323–334, 2012.
- [6] T. Kempka and M. Kühn. Numerical simulations of CO₂ arrival times and reservoir pressure coincide with observations from the Ketzin pilot site, Germany. *Environmental Earth Sciences*, 70(8):3675–3685, 2013.
- [7] W. Wang, G. Kosakowski, and O. Kolditz. A parallel finite element scheme for thermo-hydro-mechanical (THM) coupled problems in porous media. *Computers & Geosciences*, 35(8):1631–1641, 2009.
- [8] W. Wang and O. Kolditz. Sparse matrix and solver objects for parallel finite element simulation of multi-field problems. In Wu Zhang, Zhangxin Chen, Craig C. Douglas, and Weiqin Tong, editors, *High Performance Computing and Applications*, volume 5938 of *Lecture Notes in Computer Science*, pages 418–425. Springer Berlin Heidelberg, 2010.
- [9] W. Wang, B. Zehner, N. Boettcher, U.-J. Goerke and O. Kolditz O., Parallel finite element method for modeling two-phase flow processes in porous media using OGS#PETSc. *Computers & Geosciences*, under revision, 2014.