

City University of New York (CUNY)

CUNY Academic Works

Publications and Research

New York City College of Technology

2021

Inverse Kinematics of the 6DOF C12XL

Carl Liu

Brooklyn Technical High School

Lili Ma

CUNY New York City College of Technology

[How does access to this work benefit you? Let us know!](#)

More information about this work at: https://academicworks.cuny.edu/ny_pubs/823

Discover additional works at: <https://academicworks.cuny.edu>

This work is made publicly available by the City University of New York (CUNY).

Contact: AcademicWorks@cuny.edu

Inverse Kinematics of the 6DOF C12XL Robotic Arm

Carl Liu, Brooklyn Technical High School

This work was conducted under the supervision of Professor Lili Ma at New York City College of Technology during the 2021 STEM Research Academy Summer Internship sponsored by City University of New York (CUNY).

Dr. Lili Ma, New York City College of Technology

Professor Lili Ma received her Ph.D. in Electrical Engineering from Utah State University focusing on autonomous ground vehicles. After that she did three-year post-doctoral training at Virginia Tech working with autonomous aerial vehicles. Prior to joining the Computer Engineering Technology (CET) department at City Tech in fall 2016, she taught at Wentworth Institute of Technology for many years. Professor Ma's research areas include autonomous mobile robots, vision-based control, visual servoing, visual tracking, coordinated control, and sensing & perception techniques.

Inverse Kinematics of the 6DOF C12XL Robotic Arm

Carl Liu*, Brooklyn Technical High School
Lili Ma, CUNY-New York City College of Technology

This work was conducted as a research project during the 2021 STEM Research Academy Summer Internship sponsored by CUNY-New York City College of Technology.


Introduction/Background Information

Robotic manipulators have been widely used in the industry performing repetitive tasks. Our work investigated the inverse engineering of the C12XL robot. The performed analyses and derivations help for the design of other robotic manipulators of similar kind.

Usage of DH convention to assign frames and create a DH table
 (Scaled down by a factor of 100)

Frames _i	(Joint Variable) θ_i	α_i	a_i	d_i
1	q_1	$\pi/2$	1	2.672
2	q_2	0	6.5	0
3	q_3	$-\pi/2$	0.3	0
4	q_4	$\pi/2$	0	-6.50
5	q_5	$-\pi/2$	0	0
6	q_6	π	0	-0.8

DH variables allow for joint axis to be related to one another, giving a simplified description of a robotic arm.

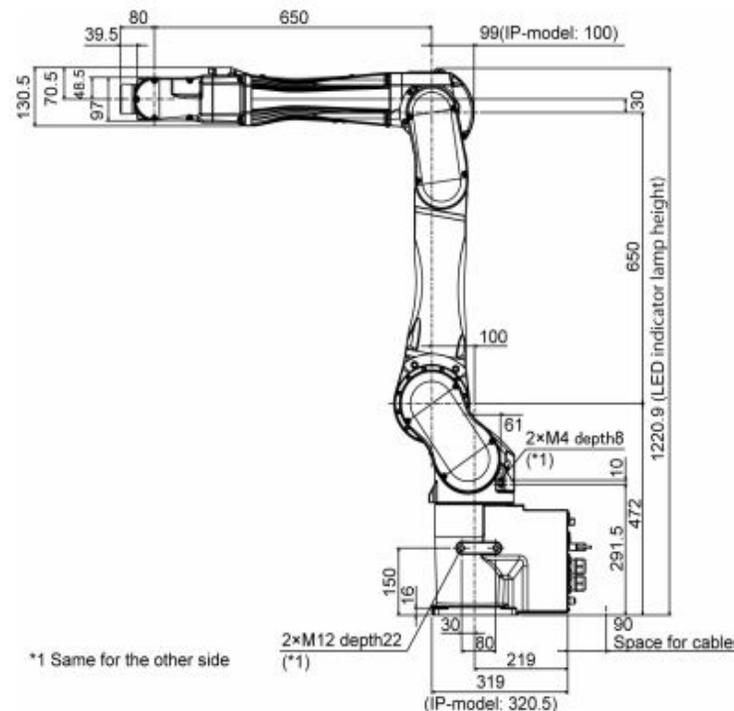

The inverse kinematics of a robotic arm is used to determine the joint variables that control the movement of each joint in a robotic arm. This makes it possible to command the robot's end effector to reach a desired position and orientation in space.

Dimensions of the C12XL Robotic Arm (Unit: mm)

Materials and Methods

Materials:

- Matlab R2021a
- Peter Corke's Matlab Robotic Toolbox
- Epson C12XL specification sheet

Desired orientation and position of the end effector

$$EOP = \begin{bmatrix} nx & ox & ax & px \\ ny & oy & ay & py \\ nz & oz & az & pz \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$EO = \begin{bmatrix} nx & ox & ax \\ ny & oy & ay \\ nz & oz & az \end{bmatrix} \quad EP = \begin{bmatrix} px \\ py \\ pz \end{bmatrix}$$

$$EO^*[0 \ 0 \ 0.8]^T = [d_{x6} \ d_{y6} \ d_{z6}]^T$$


$$[p_x \ p_y \ p_z]^T - [d_{x6} \ d_{y6} \ d_{z6}]^T = [x \ y \ z]^T$$

To obtain the first three joint variables, the desired orientation of the end effector was multiplied with the final link's vector then the XYZ components of the modified link vector was subtracted from the desired position.


Materials and Methods

The models shown below have the last link subtracted from its position and solves for the position resulted from the subtraction. The wrist is also removed to solve for the position of the end effector, which is based on the first three joints of the robotic arm.

Red - Simplified links of the robot

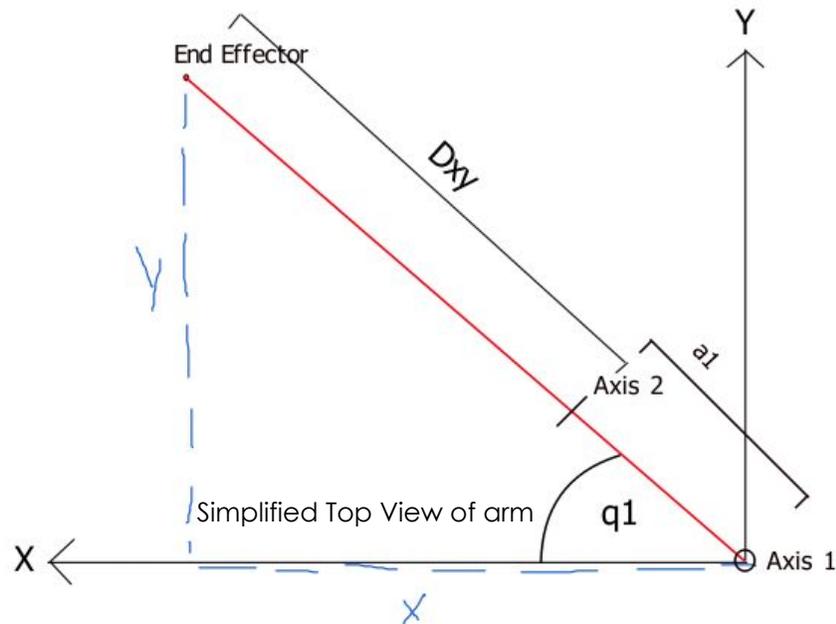

Due to the first joint rotating on the Z-axis. Second, third joints rotating on axis parallel to one another and perpendicular to the Z-axis the first joint variable is based on the angle created at q_1 when looking at the robot from top down.

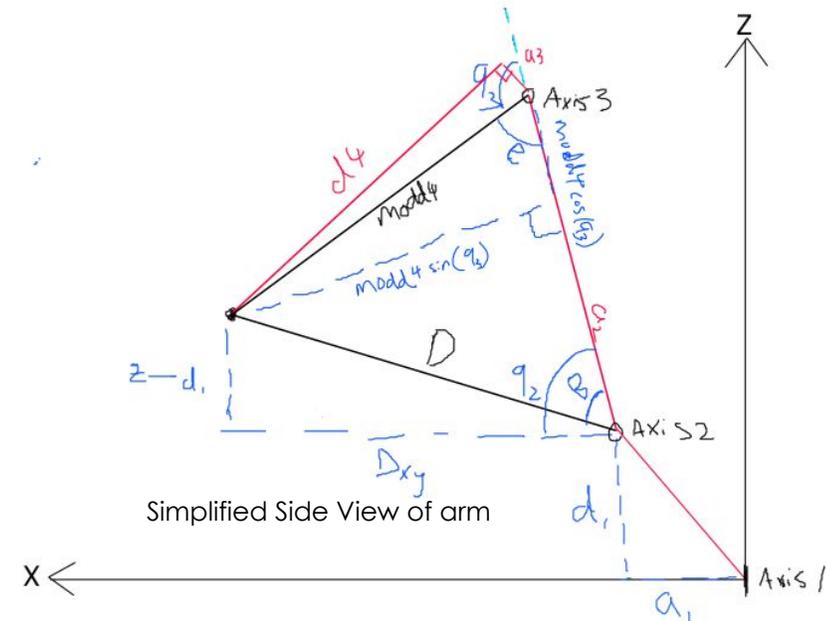

The third axis would determine the length of D . The length of D is based on the desired position and is found by subtracting the d_1 and a_1 component of the link between Axis 2 and 1 from the desired position. Axis 2 is then used to alter the Z value of the end effector.

Materials and Methods

Solving for Positioning

modd4 is the hypotenuse of a right triangle with sides a3 and d4. This is used instead of d4 because of the a3 offset

$$\text{modd4} = \sqrt{a_3^2 + d_4^2}$$

$$D = \sqrt{D_{xy}^2 + (z-d1)^2}$$

Law of Cosine: $c^2 = a^2 + b^2 - 2ab\cos(C)$

$$\cos(C) = \frac{c^2 - a^2 - b^2}{-2ab}$$

$$-\cos(C) = \frac{c^2 - a^2 - b^2}{2ab}$$

$$-\cos(e) = \frac{D^2 - \text{modd4}^2 - a_2^2}{2a_2 \text{modd4}}$$

$$\sin(e) = 1 - (-\cos(e))^2$$

$$-\cos(e) = \cos(q3)$$

$$\sin(e) = \sin(q3)$$

$$q3 = \pi/2 + \tan^{-1}(\sin(e)/-\cos(e)) - \sin(a3/\text{modd4})^*$$

$$B = \tan^{-1}((\text{modd4} * \sin(q3)) / (a_2 + \text{modd4} * \cos(q3)))$$

$$q2 = \tan^{-1}(z-d1/D_{xy}) - \tan^{-1}((\text{modd4} * \sin(q3)) / (a_2 + \text{modd4} * \cos(q3)))$$

$$q2 = \tan^{-1}(z-d1/D_{xy}) - B$$

Second Set of Solutions for Positioning of End Effector

$$q1 = \tan^{-1}(y/x)$$

Law of Cosine: $c^2 = a^2 + b^2 - 2ab\cos(C)$

$$\cos(C) = \frac{a^2 + b^2 - c^2}{2ab}$$

$$\cos(e) = \frac{\text{modd4}^2 + a_2^2 - D^2}{2a_2 \text{modd4}}$$

$$\sin(e) = 1 - \cos(e)^2$$

$$q3 = \pi - \tan^{-1}(\sin(e)/\cos(e)) - \sin(a3/\text{modd4}) + \pi/2^*$$

$$q2 = \tan^{-1}(z-d1/D_{xy}) - B$$

To solve for positioning, the law of cosine was used to find joint variables 2 and 3. Joint variable 1 was solved by using the pythagorean theorem

Finding End Effector Orientation

$$R_y(RA) = \begin{bmatrix} \cos RA & 0 & \sin RA \\ 1 & 1 & 1 \\ -\sin RA & 0 & \cos RA \end{bmatrix}$$

$$R_z(mq1) = \begin{bmatrix} \cos(mq1) & -\sin(mq1) & 0 \\ \sin(mq1) & \cos(mq1) & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$\begin{bmatrix} \cos(RA) * \cos(mq1) & \cos(RA) * -\sin(mq1) & \sin(RA) \\ \sin(mq1) & \cos(mq1) & 0 \\ -\sin(RA) * \cos(mq1) & -\sin(RA) * -\sin(mq1) & \cos(RA) \end{bmatrix} = {}^0_3R$$

$$\begin{bmatrix} \cos(RA) * \cos(mq1) & \cos(RA) * -\sin(mq1) & \sin(RA) \\ \sin(mq1) & \cos(mq1) & 0 \\ -\sin(RA) * \cos(mq1) & -\sin(RA) * -\sin(mq1) & \cos(RA) \end{bmatrix}^T = \text{Inverse}R$$

$$\begin{bmatrix} \cos(Yrot) * \cos(Zrot) & \cos(Yrot) * -\sin(Zrot) & \sin(Yrot) \\ \sin(Zrot) & \cos(Zrot) & 0 \\ -\sin(Yrot) * \cos(Zrot) & -\sin(Yrot) * -\sin(Zrot) & \cos(Yrot) \end{bmatrix} = R_y(Yrot) R_z(Zrot)$$

$${}^0_5R = R_y(Yrot) R_z(Zrot) {}^0_3R$$

$$\begin{aligned} RA &= -(q3+q2) - \pi \\ mq1 &= -q1 + \pi \\ Zrot &= q4 \\ Yrot &= -q5 \end{aligned}$$

$$\begin{aligned} EO_{F5} &= {}^0_5R * EO \\ q6 &= -\tan^{-1}(EO_{F521} / EO_{F511}) \end{aligned}$$

To find the orientation of $[d_{x6} \ d_{y6} \ d_{z6}]^T$ (last link) relative to the 3rd frame.

$$[d_{x6F3} \ d_{y6F3} \ d_{z6F3}]^T = {}^0_3R * [d_{x6} \ d_{y6} \ d_{z6}]^T$$

$$d_{xyF3} = \sqrt{d_{x6F3}^2 + d_{y6F3}^2}$$




Because the z axis of the final frame is aligned with vector $[d_{x6} \ d_{y6} \ d_{z6}]^T$,

$$q5 = \tan^{-1}(d_{xyF3} / d_{z6F3})$$




$$q4 = -\tan^{-1}(d_{y6} / d_{x6})$$

Simulation Results

Two sets of solutions of joint variables for the same positioning

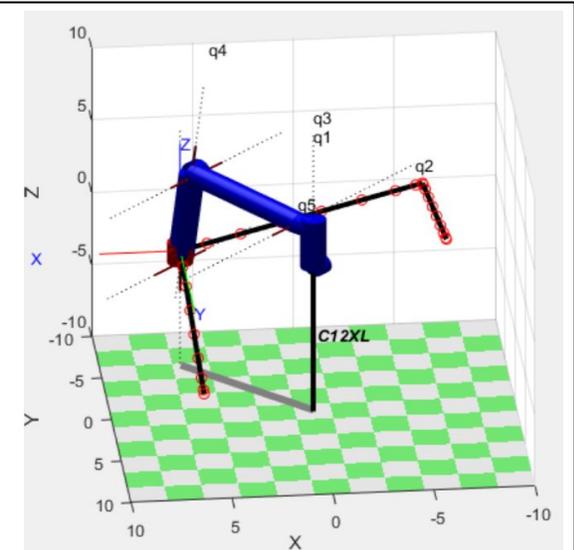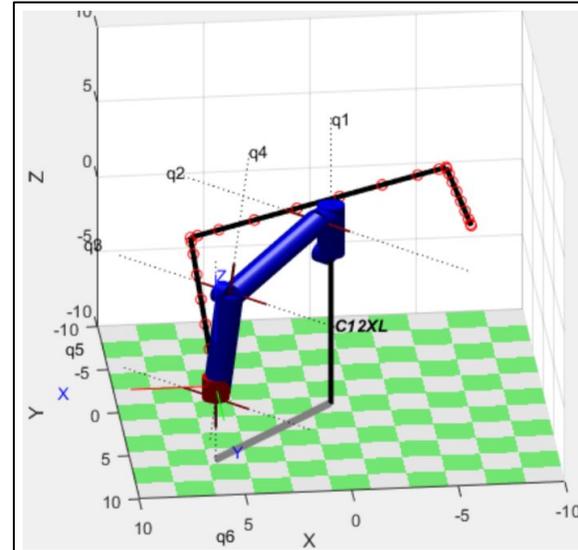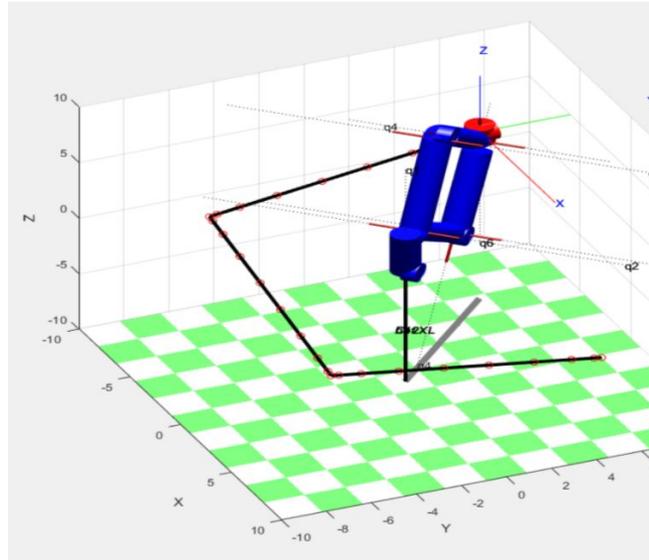

Same end effector position and orientation as the images to the left but using a different set of solutions. In this case the links are likely bumping into one another or the actual robot can't rotate this far down which is why many sets of solutions are necessary for positioning and orienting the end effector

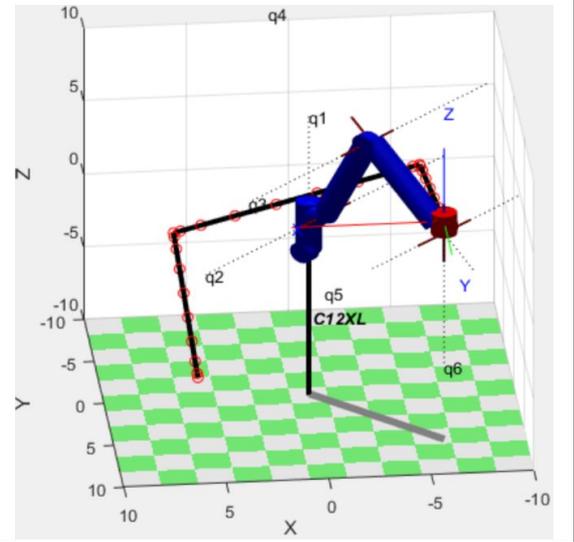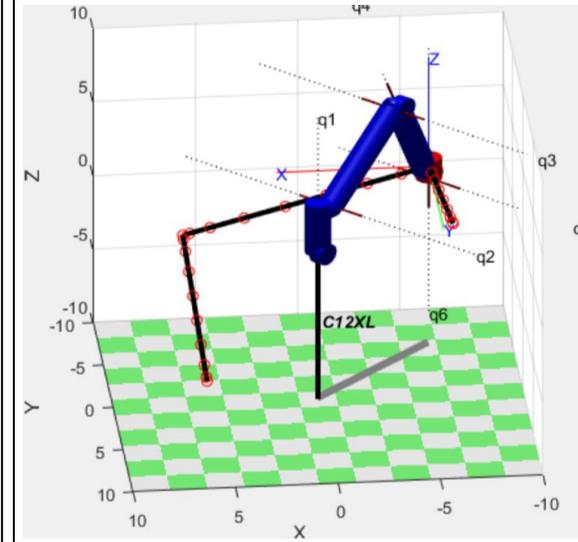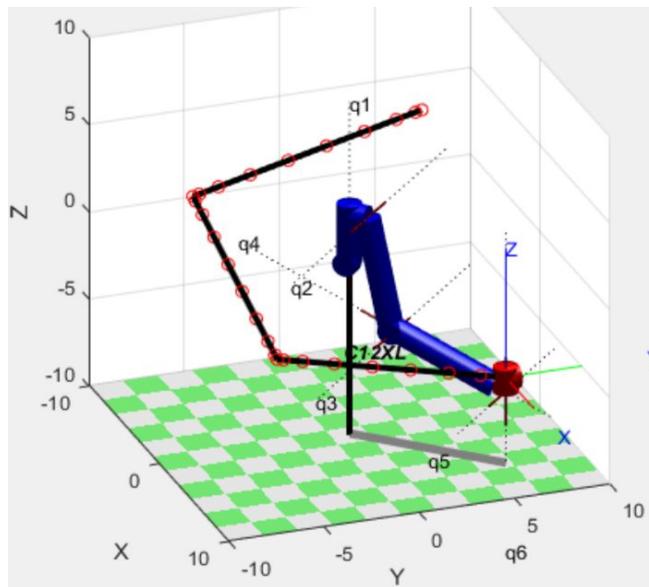

Given the desired position and orientation of the end effector, (in this case the desired orientation is a 3x3 identity matrix) the inverse kinematics can find the joint variables that allow the arm to position and orient the end effector to what is desired.

Conclusion

The Inverse kinematic of the C12XL Robotic arm is found by using a combination of trigonometry and rotation matrices. There are also two sets of solutions found for the robotic arm throughout this research. There is likely still many more sets of solutions for the C12XL robotic arm.

Citations

1. Robotics toolbox <https://petercorke.com/toolboxes/robotics-toolbox/> (accessed Aug 10, 2021).
2. Epson c12xl 6-Axis ROBOT https://epson.com/Support/Robots/6-Axis-Robots/C-Series/Epson-C12XL-6-Axis-Robot/s/SPT_RC12XL-A1401ST73SS#manuals (accessed Aug 10, 2021).
3. <https://www.mathsisfun.com/algebra/trig-cosine-law.html> (accessed Aug 10, 2021).
4. Matlab <https://www.mathworks.com/products/matlab.html> (accessed Aug 10, 2021).
5. <http://www2.cs.uregina.ca/~anima/408/Notes/Kinematics/InverseKinematics.htm>
6. automaticaddison, A. How to find denavit-hartenberg parameter tables <https://automaticaddison.com/how-to-find-denavit-hartenberg-parameter-tables/> (accessed Aug 10, 2021).
7. McGinty, B. <https://www.continuummechanics.org/rotationmatrix.html> (accessed Aug 10, 2021).
8. Modern robotics <https://modernrobotics.northwestern.edu/nu-gm-book-resource/3-3-1-homogeneous-transformation-matrices/> (accessed Aug 10, 2021).

Acknowledgement

I would like to thank Professor Abiola Olatunde and Professor Lili Ma for having taught me throughout the program. I would also like to thank the STEM research academy for giving me an opportunity to participate in undergraduate research.